


DIMENSIONS

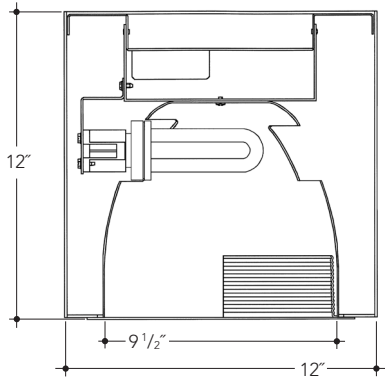

FEATURES

Housing – .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard colors White (WHT), Black (BLK), Bronze (BZ), Silver (CS).

Socket – Thermo-plastic and positive locking. *UL Listed*.

Ballast – Electronic ballast, Class P, 50/60 HZ-120/277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated. Minimum starting temperature -18°C/0°F. *UL Listed* component.

Reflector – Heavy gauge hand spun aluminum reflector with a specular "Alzak" low iridescent finish.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment. L* – Factory stem length is 12".

Wall Bracket – Cast Aluminum Construction.

Features



Manufactured and Listed to UL 1598, ETL and CSA standards. Suitable for Damp Locations. Wet location under covered ceiling.

CYLINDER STYLES

OPEN OR OPEN BAFFLED

Ceiling Mount 10" Aperture

VC1212HF Ceiling Mount, 12"x12", Horizontal, CF

Finish Options

- SCL Specular Clear "Alzak"
- SGC Soft Glow Clear
- ECL Etch Clear
- WHT White Reflector


Options

- PF Polished Flange

Baffled Finish Options

Specify reflector finish option - see above, then add baffle finish color


- BL Black Baffle
- WH White Baffle

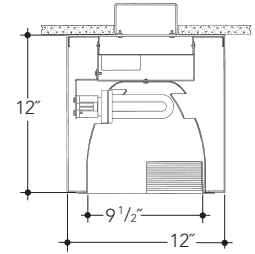

Pendant Mount 10" Aperture

VP1212HF Ceiling Mount, 12"x12", Horizontal, CF


See above for Options.

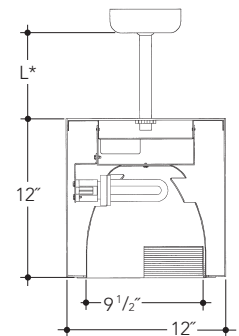

Wall Mount 10" Aperture

VW1212HF Ceiling Mount, 12"x12", Horizontal, CF

See above for Options.

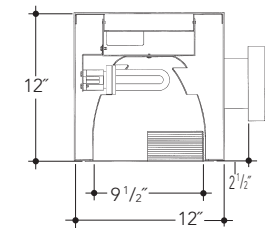

ORDERING INFORMATION

EXAMPLE: VC1212HF226E1-2-WHT-SCL

Lamps and Wattage	Mounting	Housing	Ballast	Color	Finish	Baffle	Options
2x26-42	VC	1212HF226-42	E1-2	WHT	SCL	BL	REM
Dimming	VP		E3	BLK	SGC	WH	WL*
2x32 MAX	VW		DL	BZ	ECL		
			DAX1	BA	WHT		
			DAX2	CS			
			DA7				

Ballast Options

Electronic 120-277 volt is standard
 E1-2 - Electronic (120-277V)
 E3 - Electronic (347V)

Dimming Ballast Options

DL - Lutron Eco System (120-277V)
 DAX1 - Advance Mark X (120V)
 DAX2 - Advance Mark X (277V)
 DA7 - Advance Mark VII (120-277V)

DL-Lutron Specify Wattage

All dimming and emergency are voltage specific.

Options Descriptions

REM - Remote Emergency Battery
 WL* - Suitable for Wet Locations
 * VC and VW Only

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes. Vantage recommends the use of Philips or Sylvania lamps.