Project Name: _____ Type: _____

DIMENSIONS

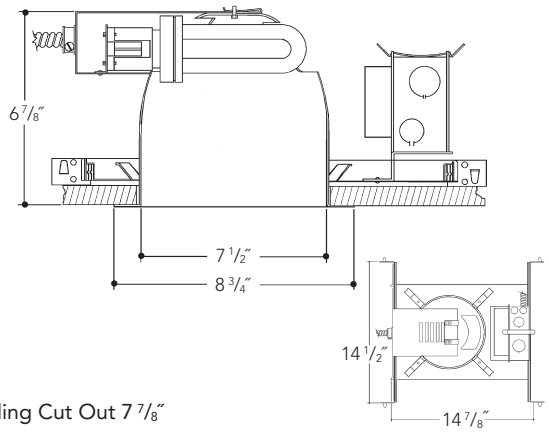

Ceiling Cut Out 7 7/8″

FEATURES

Electrogalvanized steel frame components with spring steel reflector clips for fast assembly of reflector. Innovative, rigid bar hangers incorporate formed cross sections, joist positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking bars to T-Bar using #8 self-tapping screws (supplied by others). Bars extend 14″-24″. Frame will also accept Caddy Bar #517B for fast installation in drop-in ceilings, bars extend 27″.

Electronic ballast, Class P, 50/60 HZ-120-277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated. Minimum starting temperature -18°C/0°F. *UL Listed* component.

Heavy gauge electrogalvanized steel junction box, prewired and grounded with easy access from below. Listed for through branch circuit wiring.

Aluminum socket housing with quick assembly hardware for fast assembly. *UL Listed* socket and electrical connectors.

Heavy gauge spun aluminum low iridescent reflector with self trimming white painted flange. Polished Flange available.

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations.
Wet location under covered ceiling.

REFLECTOR KIT

OPEN

2 LT, Triple Tube — 8″ Aperture



8601 Open

Finish Options

SCL Specular Clear "Alzak"
SGC Soft Glow Clear
ECL Etch Clear
WHT White Reflector

Options

PF Polished Flange

OPEN BAFFLED

2 LT, Triple Tube — 8″ Aperture



8651 Open Baffled

Finish Options

Specify reflector finish option - *see above*, then add baffle finish color

BL Black Baffle
WH White Baffle

WALL WASH

2 LT, Triple Tube — 8″ Aperture



8701 Wall Wash

Finish Options

SCL Specular Clear "Alzak"

Options

PF Polished Flange
DWW Double Wall Wash

ORDERING INFORMATION

EXAMPLE: 8THF218E1-2-8601-SCL

Lamps and Wattage	Housing	Ballast	Reflector	Finish	Baffle	Options
Quad and Triple Tube						
1x18	8THF118	E1-2	8601	SCL	BL	F
1x26	8THF126	E3	Baffled	SGC	WH	PF
1x32, 1x42	8THF132-42	DL	8651	ECL		EM
2x18	8THF218	DAX1		WHT		EMI
2x26	8THF226	DAX2	Wall Wash			DWW
2x32, 2x42	8THF232-42	DA7	8701			GSK

Ballast Options

Electronic 120-277 volt is standard
E1-2 - Electronic (120-277V)
E3 - Electronic (347V)

Dimming Ballast Options

DL - Lutron Eco System (120-277V)
DAX1 - Advance Mark X (120V)
DAX2 - Advance Mark X (277V)
DA7 - Advance Mark VII (120-277V)

Options Descriptions

F - Fused
PF - Polished Flange
EM - Emergency Battery
EMI - Emergency Battery w/ Internal Mounted Test Switch
DWW - Double Wall Wash
GSK - Neoprene Foam Gasketing

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes.
Vantage recommends the use of Philips or Sylvania lamps.